

The new FX-Series

*Top of the class for speed
and strength.*



- Fast and accurate
 - tracks at twice the speed you can write
- Very durable
 - withstands the rigours of class and board rooms
- Can be used as an ordinary whiteboard
- Bluetooth wireless
 - ensures the best and safest choice
- Function buttons for speed and flexibility



FX-77 **Interactive Whiteboard**

Essential interactive whiteboard for training, teaching, presentations and meetings.



Main Features:

- Use a variety of pens, papers, backgrounds and effects.
- Switch effortlessly from pen to mouse.
- Customise your toolbar, from a wide selection of tools to meet your individual classroom needs.
- Add notes, and highlight or add emphasis to the images.
- Move and resize objects.
- Scroll, so you never run out of space.
- Convert hand-drawn shapes into geometrical objects.
- Save time with drag-and-drop applications.
- Converts free form to text using handwriting recognition software.
- Hide-and-reveal questions.
- Save favourites for tried-and-tested lessons.
- Keyboard shortcut for lesson creation away from the board.
- The cursor can be hovered over an icon to reveal the icon's function.
- 'Spotlight' or magnify a specific area.
- Record your live sessions (audio-visual) to replay later.


System Specifications

Product Name	FX-77 (Wireless)
Ratio	4/3
Model No	AH00087
Input Methods	Infrared and Ultrasonic Methods
Interface to Computer	
Wired	USB 2.0
Wireless	Bluetooth 1.1
Effective Screen Size (mm)	77 inches 1,573 (W) x 1,180 (H)
StarBoard Dimensions (mm)	1,793 (W) x 1,220 (H) x 77.5 (D)
Overall Dimensions (mm) (including Stand)	1,794 (W) x 1,700 x 2,050 (H) x 620 (D)
IR Wavelength	880 nm
Ultrasonic Frequency	40 KHz
Sampling Rate	Approximately 66 points/s
Accuracy	±15mm
Current / Input Voltage	200mA (5V)
AC Adapter Input Voltage /Power Consumption	100 - 240 / 0.5A
AD Adapter Output Voltage / Power Consumption	5.0V / 2.0A
Weight of Main Unit / Weight including Stand	17kg / 33kg
Bundled Software	StarBoard Software, 1 set
Environment Conditions	
Ambient Temperature	10 - 35°C
Humidity	10 - 80%
Battery Life	Continuous operating tim approximately 90 hours *1
Compatible Operating Systems	Windows Me, 2000, XP

*1 The battery life varies according to the temperature and the usage environment

Printed date: 1st October 2006

System Configuration Example

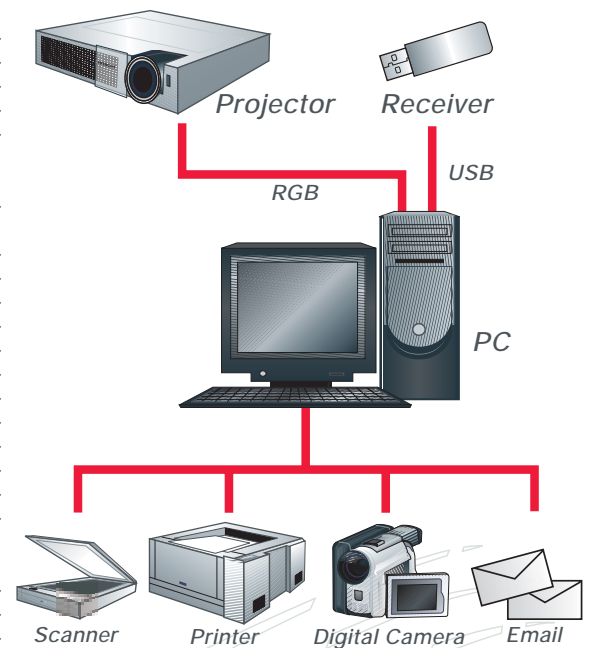

Hitachi Home Electronics Asia (S) Pte Ltd

438A Alexandra Road #01-01/02/03, Alexandra Technopark, Singapore 119967
Tel: +65-6536-2520 • Fax: +65-6536-2521 • Website: www.hitachimultimedia.com.sg

Hitachi Sales (Malaysia) Sdn. Bhd.

Wisma Hitachi, No. 2, Lorong 13/6A, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-79573455 • Fax: +60-3-79556090

Hitachi Sales (Thailand), Ltd.

994, 996 Sol Thonglor, Sukhumvit 55 Road, Klongton, Klongtoey, Bangkok 10110, Thailand
Tel: +66-2-381-8381 • Fax: +66-2-381-9520

Hitachi India Trading Pvt. Ltd

Hindustan Time House (10th Floor), 18-20 Kasturba Gandhi Marg, New Delhi - 110 001 India
Tel: (91-11) 331-5635, 371-2817 • Fax: (91-11) 331-3742 • Website: www.hitachi.co.in

HITACHI

Inspire the Next

HITACHI
Inspire the Next

New StarBoard® Series

*More impact for presentations
and lessons.*



StarBoard
HITACHI

T-17SXL

Interactive Panel for Higher Resolution

Essential interactive tablet for presentation, conducting lesson in class to auditoriums.



Main Features:

- 17-inch LCD display screen.
- SXGA resolution with excellent colour and contrast.
- Thin screen that assures natural, accurate operation.
- 8 hardware function buttons.
- A smoothly adjustable tilt stand.
- StarBoard suite of professional presentation and collaboration software.
- A pen driven, icon orientated user interface allows users to move from running Windows or digital video applications to annotating over them.
- Ability for simultaneous viewing and annotation by multiple systems connected either locally or across the internet.
- A VGA output connector, providing an easy method of connecting projectors and monitors.

Technical Specifications

Display Characteristics

Driver Type	Active-Matrix Liquid Crystal Display (TFT)
Effective Screen Size (mm)	17 inches 337.920 (W) x 270.336 (H)
Resolution	1,280 x 1,024 (SXGA)
Pixel Pitch (mm)	0.264 x 0.264
Standard Colours	16,200,000 colours
Brightness	260 cd/m ²
Contrast Ratio	450 : 1
Viewing Angles	70°(right), 70°(left), 70°(up), 70°(down)

Digitiser Characteristics

Input System	Electromagnetic induction
Pen	Stylus pen (uses one AAA alkaline dry cell; battery life: approx. 1800 hours*)
Coordinate Resolution (mm)	0.05
Reading Accuracy (mm)	+/- 0.5
Tracking Speed	Approximately 125 points per second
Interface	USB interface (USB 1.1)

* Battery life varies depending on the temperature and humidity of the usage environment

Input / Output

Input	Dsub 15-pin (analogue RGB) Stereo mini-jack (stereo audio)
Output	Dsub 15-pin (analogue RGB)
Speaker Output	Stereo (1W + 1W built-in amplifier)

System Environment

Temperature	During use: +10 ~ +35°C; in storage: -10 ~ +60°C
Humidity	During use: 30 ~ 80%; in storage: 10 ~ 80% (no condensation)

Dimensions

External (mm)	395 (W) x 375 (H) x 57 (D) (without Stand)
Weight	Approximately 5.0kg
Stand Adjustment	Adjustable in the range of 20° to 70°
Compatible Operating Systems	Windows 2000/XP

Power Consumption / Power Supply


Consumption	40W or less (4W or less in power saving mode)
Input	AC adapter Input (AC 100 ~ 240V, 50/60 Hz, 1A)
Output	DC 12V, 3.3A

Minimum System Requirements

CPU	Pentium II 300MHz or faster (Pentium III 800MHz recommended)
Free Hard Drive Space	200MB or more
RAM	128MB or more (256MB recommended)
Display Colours	High Colour (16-bit) or more
Operating Systems (OS)	Windows 2000/XP
Software Required	Internet Explorer 6.0, Powerpoint 2000/2002/2003, DirectX 9.0b (when using Windows 2000/XP)
Other	Video card that includes hardware overlay (when using video function) Pentium 41.8GHz or more and RAM 512MB or more are required for movie or network feature

Printed date: 1st October 2006

System Configuration Example

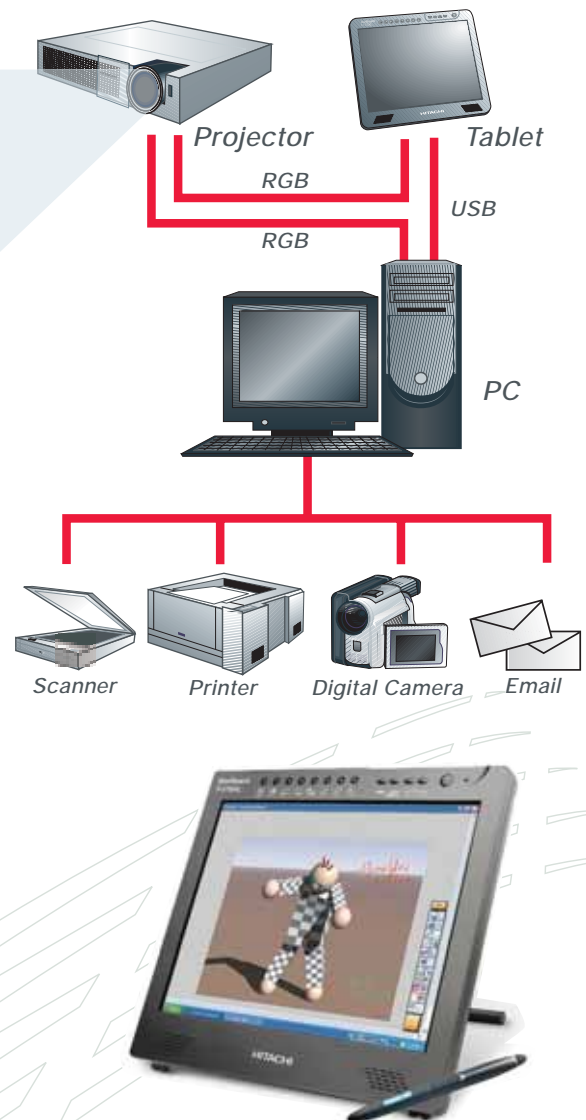

Hitachi Home Electronics Asia (S) Pte Ltd

438A Alexandra Road #01-01/02/03, Alexandra Technopark, Singapore 119967
Tel: +65-6536-2520 • Fax: +65-6536-2521 • Website: www.hitachimultimedia.com.sg

Hitachi Sales (Malaysia) Sdn. Bhd.

Wisma Hitachi, No. 2, Lorong 13/6A, 46200 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-79573455 • Fax: +60-3-79556090

Hitachi Sales (Thailand), Ltd.

994, 996 Sol Thonglor, Sukhumvit 55 Road, Klongton, Klongtoey, Bangkok 10110, Thailand
Tel: +66-2-381-8381 • Fax: +66-2-381-9520

Hitachi India Trading Pvt. Ltd

Hindustan Time House (10th Floor), 18-20 Kasturba Gandhi Marg, New Delhi - 110 001 India
Tel: (91-11) 331-5635, 371-2817 • Fax: (91-11) 331-3742 • Website: www.hitachi.co.in

HITACHI

Inspire the Next